

Roof Tower


High stability and strength Roof Tower introduced from CD KT-Series tower technology brought to this sturdy construction and light weight accumulated through several field tests



CR18



CR30

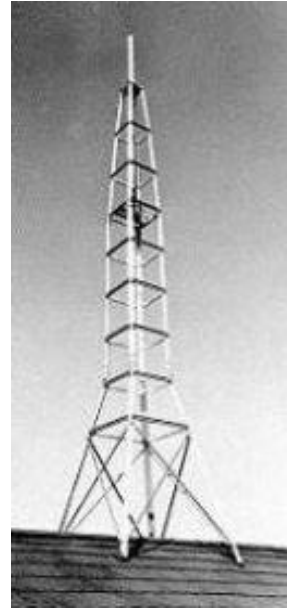

CR45

Create roof towers constructed of high grade aluminum with galvanized steel bracing for added stability and strength will easily accommodate your antenna requirements. Four sizes of roof towers will support VHF antennas, HF tri-banders, and oscar systems. Rotators easily mount inside the tower. An optional thrust bearing (CK46) is recommended. Specifications are subject to change without notice or obligation.

| Model | CR18 | CR30 | CR45 | CR7 |
|-------------------------|------|------|------|------|
| Overall Length (m) | 1.9 | 3.1 | 4.7 | 1.29 |
| Mast Diameter (mm) Max. | 62 | 62 | 62 | 60.5 |
| Weight (kg) | 10.0 | 15.0 | 21.0 | 10.0 |

| Guy Kit for CR7 | |
|-----------------|--|
| Contents | Turn-buckle Stay Wire 7.5m (sus) Bolt Connector Hook Bolt |

Option: Grade up Kit, CR30 CR45

Bearing for Rotator: Possible to mount the most of domestic product (except for CR7)

The most suitable mast diameter for CR18 , CR30 and CR45: 49x4mm

Applicable mast diameter of ground wave dish for CR7: 23~36mm